



Sunrider II

Assembly instructions

Part 7 Electrical Installation

23 February 2014




Contents part 5 – Covers

Sec.	Subject	Slide
7/1	Wiring	



**7/1.
Wiring.**

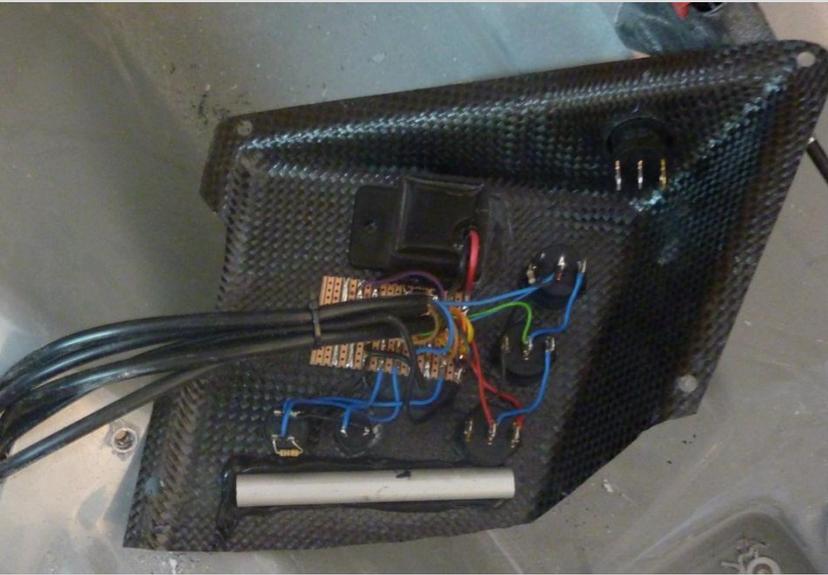

The wiring is connected to the dashboard, here showing the inside. In this case, an extra switch is installed at the side of the dashboard for the interior lighting. Install a piece of aluminum tube with some kit in order to stiffen the dashboard



Size the dashboard to fit it on the inner shell. Hold the dashboard in place and drill two holes 5 mm at indicated locations through both the dashboard and the inner shell. Re-drill the holes in the inner shell to 7.5 mm. Push rivet insert nuts in these holes and fasten it using a rivet insert nut plier (see part 5 'covers').



Fasten the dashboard at the two rivets and repeat this procedure at the other edges of the dashboard.



Dis-assemble the steering handle (screwing the Allen screws inwards), slide the brake lever over the steering handle and feed the electric cable through the handle. The turning signal switch on the left handle, the horn and signaling switch on the right handle. Next re-assemble the steering handles.